

SINGLE SHUT OFF QUICK RELEASE COUPLINGS

233 Series



Single shut off:
The plug designed straight through, coupling shuts off immediately when connection is broken. The ideal solution for operating compressed air tools.

Single handed operation
Compact robust construction
High flow, low pressure drop
Wide range of connections



TECHNICAL DATA

Operating pressure:

0 to 35 bar

Working temperature:

-20°C to +100°C

Nominal diameter:

5 = 20mm²

Air flow:

560 l/min (6 bar inlet, pressure drop 0,5 bar)

COMPATIBILITY

Rectus 21, Rectus 90

Camozzi

Ewo

Kani

MATERIALS

Coupling:

Back body - brass, nickel plated

Valve body - brass, nickel plated

Sleeve - brass, nickel plated

Valve - brass



Spring and locking ring - AISI 301

Locking balls - AISI 420

Seals - NBR

Plug:

Plug - brass, nickel plated

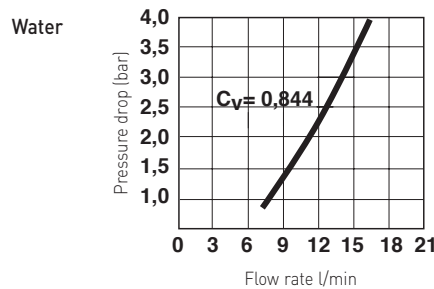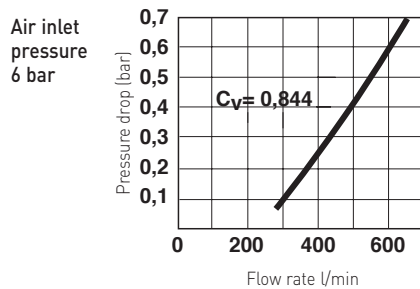

Socket - male thread

BSPP	MODELS
1/8	233210018
1/4	233210028



Socket - spring guard

O/D I/D tube	MODELS
6/4	233290400
8/6	233290600



Socket - female thread

BSPP	MODELS
1/8	233220018
1/4	233220028



Socket - push on panel mounted

O/D I/D tube	MODELS
6/4	233280400
8/6	233280600



Plug - hose barb

ID Hose	MODELS
4	233130400
6	233130600
9	233130900



Socket - hose barb

ID Hose	MODELS
4	233230400
6	233230600
9	233230900



Plug - male thread

BSPP	MODELS
1/8	233110018
1/4	233110028



Plug - push on fitting

O/D I/D tube	MODELS
6/4	233160400
8/6	233160600



Socket - push on fitting

O/D I/D tube	MODELS
6/4	233260400
8/6	233260600



Plug - female thread

BSPP	MODELS
1/8	233120018
1/4	233120028



Plug - spring guard

O/D I/D tube	MODELS
6/4	233190400
8/6	233190600



For further information



www.norgren.com/info/en7-089