

SINGLE SHUT OFF QUICK RELEASE COUPLINGS

234 Series



Single shut off:

The plug designed straight through, coupling shuts off immediately when connection is broken. The ideal solution for operating compressed air tools.

Single handed operation

Low pressure drop
High flow rate

TECHNICAL DATA

Operating pressure:

0 to 35 bar

Working temperature:

-20°C to +100°C

Nominal diameter:

7,8 = 48mm²

Air flow:

1800 l/min (input pressure 6 bar, pressure drop 0.5 bar)

COMPATIBILITY

RECTUS 25 and 26

CEJN 320

JWL 520 and 530

MATERIALS

Coupling:

Back body - brass, nickel plated

Valve body - brass, nickel plated

Sleeve - hardened steel, nickel plated

Valve - zinc diecasting, nickel plated

Inner sleeve - brass

Spring plate - brass



Spring and locking ring - AISI 301

Locking balls - AISI 420

Seals - NBR

Plug:

Plug Profile - hardened steel, nickel plated

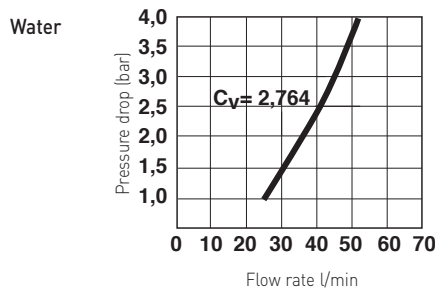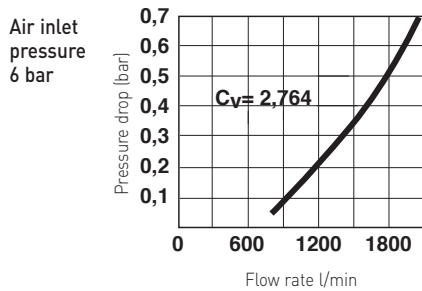

Socket - male thread



BSPT	MODELS
1/4	234210028
3/8	234210038
1/2	234210048

Plug - male thread



BSPT	MODELS
1/8	234110018
1/4	234110028
3/8	234110038
1/2	234110048

Socket - female thread



BSPP	MODELS
1/4	234220028
3/8	234220038
1/2	234220048

Plug - female thread



BSPP	MODELS
1/4	234120028
3/8	234120038
1/2	234120048

Socket - hose barb



ID Hose	MODELS
6	234230600
9	234230900
13	234231300

Plug - hose barb



ID Hose	MODELS
6	234130600
9	234130900
13	234131300

For further information



www.norgren.com/info/en7-092