

SINGLE SHUT OFF QUICK RELEASE COUPLINGS

238 Series



Single shut off:

The plug designed straight through, coupling shuts off immediately when connection is broken. The ideal solution for operating compressed air tools.

Single handed operation

European standard industrial coupling
High flow rate, low pressure drop
Industrial standard profile

TECHNICAL DATA

Operating pressure:

0 to 35 bar

Working temperature:

-20°C to +100°C

Nominal diameter:

7,2 = 40mm²

Air flow:

1000 l/min (input pressure 6 bar, pressure drop 0,5 bar)

COMPATIBILITY

CEJN 320

RECTUS 25 and 26

JWL 520 and 530

MATERIALS

Coupling:

Back body - brass, nickel plated

Valve body - brass, nickel plated

Sleeve - brass, nickel plated

Valve - brass



Spring and locking ring - AISI 301

Locking pins - AISI 420

Seals - NBR

Plug:

Plug - brass, nickel plated

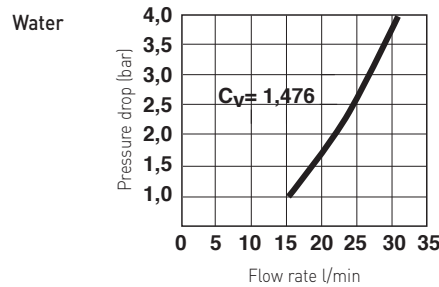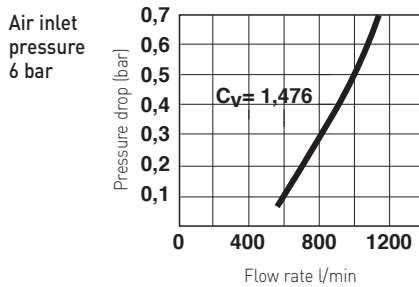

Socket - male thread



BSPP	MODELS
1/4	238210028
3/8	238210038
1/2	238210048

Plug - male thread



BSPP	MODELS
1/8	238110018
1/4	238110028
3/8	238110038
1/2	238110048

Socket - female thread



BSPP	MODELS
1/4	238220028
3/8	238220038
1/2	238220048

Plug - female thread



BSPP	MODELS
1/4	238120028
3/8	238120038
1/2	238120048

Socket - hose barb



ID Hose	MODELS
6	238230600
9	238230900
13	238231300

Plug - hose barb



ID Hose	MODELS
6	238130600
9	238130900
13	238131300

For further information



www.norgren.com/info/en7-091