

SINGLE SHUT OFF QUICK RELEASE COUPLINGS

239 Series



Single shut off:
Heavy duty
High flow rates
Industrial standard

TECHNICAL DATA

Operating pressure:
0 to 35 bar

Working temperature:
-20°C to +100°C

Nominal diameter:
11 = 95mm²



Air flow:
2350 l/min (input pressure 6 bar,
pressure drop 0.5 bar)

COMPATIBILITY

INDUSTRIAL INTERCHANGE 1/2"
US-MIL-SPEC-C-4109 1/2"
ISO 6150-B-17
Dynaquip D5 series
Rectus 37 series
GROMELLE 1300
ARO HANSEN 5000

MATERIALS

Coupling:
Back body - brass, nickel plated
Valve body - brass, nickel plated
Sleeve - brass, nickel plated
Valve - brass
Spring and locking ring - AISI 301
Pins - AISI 420
Seals - NBR
Plug:
Plug - hardened steel, nickel plated

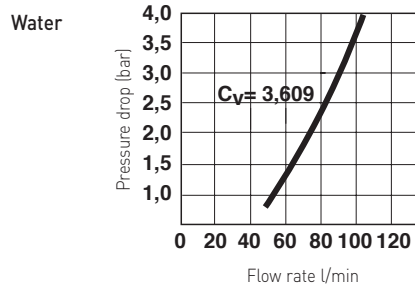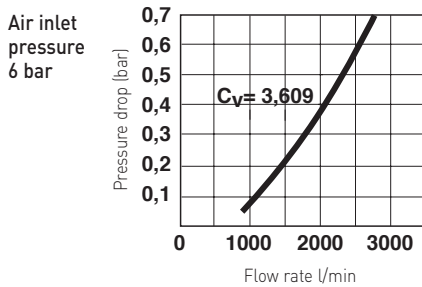


Socket- male thread



BSPP	MODELS
1/2	239210048
3/4	239210068

Plug - male thread



BSPT	MODELS
1/2	239110048
3/4	239110068

Socket - female thread




BSPP	MODELS
1/2	239220048
3/4	239220068

Plug - female thread



BSPP	MODELS
1/2	239120048
3/4	239120068

Socket - hose barb



ID Hose	MODELS
13	239231300
19	239231900

Plug - hose barb



ID Hose	MODELS
13	239131300
19	239131900

For further information



www.norgren.com/info/en7-096