

QUICK EXHAUST VALVES 4050 Series

G1/8 ... G1



High flow rate from A to R
 Low min. pressure
 Compact design
 Simple construction
 Also suitable as two-way valve
 or double check valve

TECHNICAL DATA

Medium:

Compressed, filtered, lubricated or non-lubricated air

Operating pressure:

0,5 to 10 bar

Ambient temperature:


-20°C to +80°C max.

MATERIALS


Body: Brass, nickel-plated

Cover: Brass, nickel-plated

Moulded part: PUR

	B	C	E	F	ØH	S	Flow rate (l/min)*		kg	MODELS
							1 to 2	2 to 3		
	G1/4	65	24	25,5	34	19	850	2160	0,18	4050214
	G1/2	82	30	33	44	32	2160	5700	0,43	4050314
	G1	109	48	39	80	46	3400	12500	1,76	4050514

*At 6 bar with 1 bar pressure drop

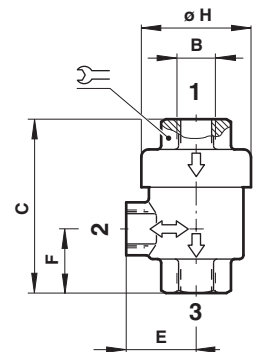

For further information



www.norgren.com/info/en7-104