

EXCELON MODULAR SYSTEM

Combination filter/regulators and lubricators

BL72, 73, 74 – G1/4 ... G1/2



Boxed sets include: filter/regulator and micro-fog lubricator complete with exhausting shut-off valve, pressure gauge and mounting brackets

High efficiency water and particle removal

Quick release bayonet bowls

Push to lock adjusting knob with tamper resistant option

All round (360°) visibility of lubricator sight feed dome for ease of drip rate setting

Micro-fog lubricator for most general purpose pneumatic applications

TECHNICAL DATA

Medium:

Compressed air

Maximum inlet pressure:

10 bar

Gauge ports:

RC 1/8


Ambient temperature:

-20°C to +50°C

Consult our Technical Service for use below +2°C

Pressure range:

0,3 ... 10 bar

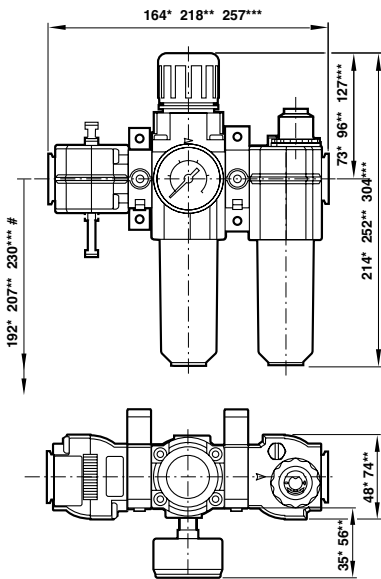

*BL72, **BL73, ***BL74

Minimum clearance required to remove bowl



Models

BOXED SETS BL72, BL73 AND BL74 WITH SHUT-OFF VALVE				Port Size	Bowl
AUTO DRAIN Model	MANUAL DRAIN Model				
				G1/4	T
				G3/8	T
				G1/2	GT

BOXED SETS BL72, BL73 AND BL74 WITHOUT SHUT-OFF VALVE				Port Size	Bowl
AUTO DRAIN Model	MANUAL DRAIN Model				
				G3/8	T
				G3/8	T
				G1/2	GT

T=Transparent bowl GT= Guarded transparent bowl

Accessories

Tamper resistant kit	Quick fill nipple	Filter element (40 micron)
4255-51	-	5925-02
4455-51	18-011-024	4438-03
4355-51	18-011-024	4338-05

Tamper resistant kit	Quick fill nipple	Filter element (40 micron)
4255-51	-	5925-02
4455-51	18-011-024	4438-03
4355-51	18-011-024	4338-05

For full service kits including drains refer to individual units

For further information
www.norgren.com/info/nec/en181

