

Metallic parts meet NACE*

Designed for use in corrosive environments

Adjusting knob has snap-action lock

Applications include marine environment, oil and gas production, chemical and industrial compressed air systems

* National Association of Corrosion Engineers (NACE) MR-01-75) defines requirements for sulphide stress cracking resistant materials used in well-head and other corrosive environments.



Technical features

Medium:
 Compressed air or neutral gases
 Other media on request
Operating pressure:
 20 bar max
Pressure range:
 0,3 ... 8,5 bar, 0,3 ... 3,5 bar

Diaphragm:
 With or without relieving
Typical flow:
 see below
Gauge ports:
 1/8 PTF

Fluid/Ambient temperature:
 -25 ... +66°C
 (Acetal bonnet)
 -25 ... +80°C
 (T-handle)
 - 40°version on request
 Air supply must be dry enough to avoid ice formation at temperatures below +2°C.

Materials:
 Body and valve: 1.4104 (316) stainless steel
 Bonnet: 1.4104 (316) stainless steel with T-handle or Acetal with stainless steel adjusting screw
 Valve seat: Acetal
 Springs: 1.4319 (302) Stainless steel
 Elastomers: FPM

Technical data, Standard models

Symbol	Port size	Outlet pressure range (bar)	Flow *1) (dm ³ /s)	Diaphragm	Bonnet type	Weight (kg)	Model
	1/4 PTF	0,3 ... 8,5	7	Relieving	Knob (Acetal)	0,15	R05-200-RNLA
	1/4 PTF	0,3 ... 8,5	7	Relieving	T-handle (stainless steel)	0,26	R05-232-RNLA

*1) Typical flow with 10 bar inlet pressure, 6,3 bar set pressure and 1 bar droop form set.

Option selector

R05-2★-★N★A


Bonnet	Substitute
Standard knob (Acetal)	00
T-handle (Stainless steel)	32

Outlet pressure adjustment ranges *	Substitute
0,3 ... 3,5 bar	E
0,3 ... 8,5 bar	L
Diaphragm	Substitute
Relieving	R
Non relieving	N


* Outlet pressure can be adjusted to pressures in excess of, and less than, those specified. Do not use these units to control pressures outside of the specified ranges.

Air flow characteristics

R05 – Port size: 1/4 PTF, inlet pressure: 12 bar, pressure range: 0,3 ... 8,5 bar

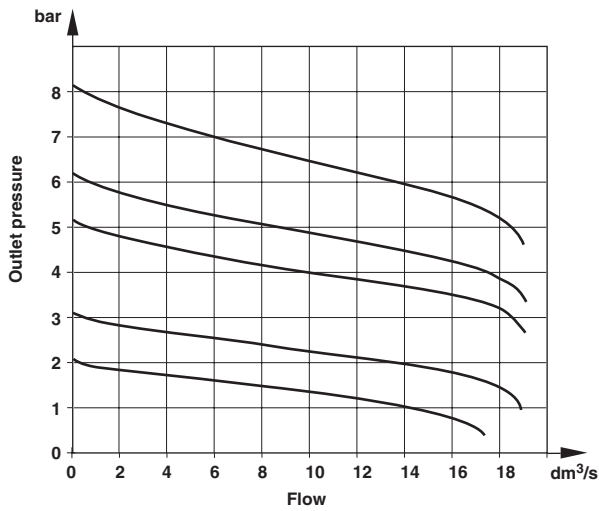

Regulator with Acetal bonnet

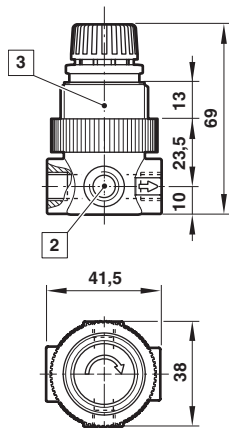

2 Gauge port: 1/8 PTF, standard units are shipped with two plugs for sealing gauge ports.

3 Panel mounting hole diameter 30 mm, Panel thickness 0 ... 6 mm

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

Accessories



2962-89 (Acetal) 18-013-844 *1)


*1) Stainless steel items not strictly to NACE standard MR-01-75.

Spares kit



3407-71 (Relieving)
3407-72 (Non-relieving)

Regulator with stainless steel T-handle

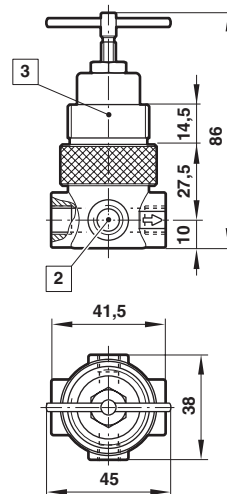

The system designer is warned to consider the failure modes of all component parts used in pneumatic systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.